
## Rondo Medium-Range Micro Sprinkler



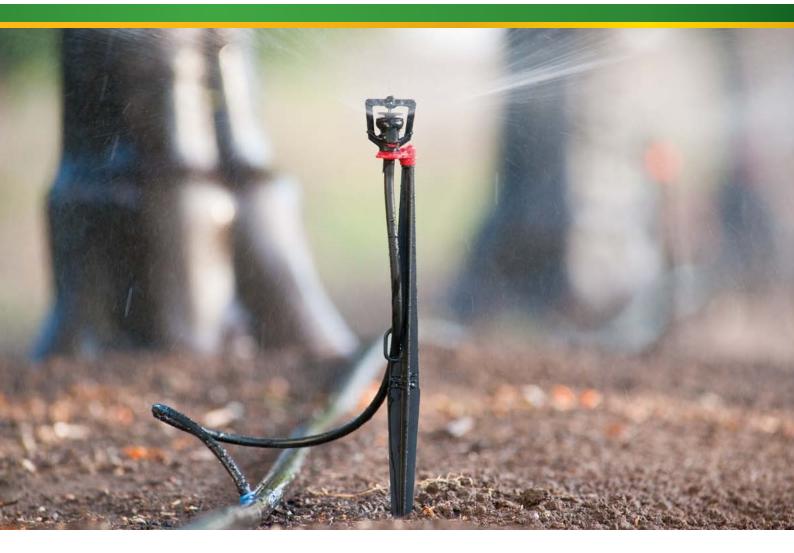

The Rondo medium-range micro sprinkler is a great choice for orchards, greenhouses, and vegetable crops. With a wide range of configurable features and flexible installation options, the Rondo can deliver the spray pattern that's right for your crop. The Rondo delivers gentle droplets and a consistent spray pattern while inverted in greenhouses, under the canopy in orchards and on metal stakes in vegetable fields.

The Rondo's spray pattern size is moderate to wide and can be used for spacings of up to 7.5 meters by 7.5 meters. As an additional feature, the Rondo is designed to be easily disassembled, allowing for both field maintenance and replacement of individual parts.

The Rondo is available with optional features including an antiinsect snap-fit cup and numerous deflector plates, providing added protection and specialized spray patterns.

## Rondo Specifications

Flow rates: 30-300 lph

Recommended operation pressure: 1.5-2.5 bar

Versatility - a wide choice of models and applications: Single or double bridge frame, Installed in upright or inverted position, 11 colour-coded nozzle sizes

3 assembly options with bayonet-mount nozzles: 3/8" THM x conic female inlet - accommodates Meteor adaptors or

threaded hammer stakes

Ultra Nozzle - with either 5mm threaded inlet (flow rates up to 200 lph) or conic female inlet, mounted on spiked plastic stakes or 8 mm metal rods.

Applications:

gardens.

Under-canopy irrigation in orchards,
On metal rods for vegetables irrigation,
In greenhouses, inverted overhead
Single bridge - recommended for







## Rondo - Performance Data

Nozzle	Flow	Effective Wetting Diameter				Radius		
Color &	Rate	Spinners	Deflectors					
Size (mm)	(lph)	Black**	Violet**	Green***	Blue***	2x30°	90°	180°
Light blue*								
	30	6.5	4.4	7.4	5.2	n.a.	n.a.	n.a.
Black 0.85								
	39	5.8	4.6	8.6	6.8	2.1	2.5	2.3
Blue 1.0								
	51	6.6	5.0	8.6	7.4	2.2	2.8	2.6
Dark blue 1.1								
	64	7.6	5.4	8.6	7.4	2.3	3.5	2.7
Green 1.2								
	75	8.8	5.2	9.8	8.0	2.4	3.6	2.8
Red 1.4								
	102	9.4	5.6	10.7	8.6	2.5	4.0	3.0
White 1.6								
	132	10.0	7.2	10.8	8.6	2.6	4.2	2.9
Violet 1.8								
	174	10.5	7.6	11.2	9.2	2.8	5.0	3.0
Yellow 2.0								
	205	11.0	8.0	11.4	9.6	3.0	5.6	3.1
Brown 2.2								
	254	11.0	8.6	11.2	9.6	3.3	6.1	3.3
Orange 2.4								
	298	11.0	9.0	10.6	9.6	3.6	6.1	3.5

<sup>\*</sup> Light Blue - Ultra threaded 5.0 mm nozzle only

Performance data are obtained under ideal test conditions and may be adversly affected by wind, hydraulic conditions and other factors (at 2.0 bar).

## Max. Recommended No. of Sprinklers on Irrigation Laterals

Nozzle	Tube Diameter	Spacing between Emitters (m)								
	O.D. (mm)	3	4	5	6	7	8			
Light blue										
	16.0	21	19	17	16	15	15			
	20.0	32	29	27	25	24	23			
Black										
	16.0	20	18	16	15	14	13			
	20.0	31	27	25	24	22	21			
Blue										
	16.0	16	14	13	12	11	11			
	20.0	25	22	21	19	18	17			
Dark blue										
	16.0	13	12	11	10	10	9			
	20.0	21	19	17	16	15	14			
Green										
	16.0	12	10	10	9	7	7			
	20.0	18	17	15	14	12	11			
Red										
	16.0	10	8	8	7	10	10			
	20.0	15	13	12	12	17	16			
White										
	16.0	8	7	6	6	6	5			
	20.0	13	11	10	10	9	9			
Violet										
	25.0	15	14	13	12	11	11			
	32.0	24	22	20	19	18	17			
Yellow										
	25.0	14	13	12	11	10	10			
	32.0	22	20	18	17	16	15			
Brown										
	25.0	12	11	10	10	9	9			
	32.0	19	17	16	15	14	13			
Orange										
	25.0	11	10	9	9	8	8			
	32.0	17	15	14	13	12	12			

This literature has been compiled for worldwide circulation and the descriptions, photos, and information are for general purpose use only. Please consult with an irrigation specialist and technical specifications for proper use of John Deere Water products. Because some products are not available in all regions, please contact your local dealer for details. John Deere Water reserves the right to change specifications and the design of all products without notice. John Deere's green and yellow color scheme, the leaping deer symbol and John Deere are trademarks of Deere & Company.

01-11-ISO-DS-ROND-ENG-EU-14-0141 www.JohnDeereWater.com

<sup>\*\*</sup> Upright position: 25 cm above ground level

<sup>\*\*\*</sup> Inverted position: 200 cm above ground level