



Agri Drip™ PC Drippers



A sealed turbulent flow path Pressure Compensating dripper incorporating a diaphragm that maintains a uniform flow rate over a wide range of operating pressures.

Features

- Three available models: 2 lph, 4 lph & 8 lph.
- Positive barb connection to suit 4 mm ID tube or connect directly to supply tubing .
- UV stabilised materials for long life.
- Resistant to common agricultural chemicals & fertilisers.


Applications

Horticultural tree and row crops, vineyards and landscape applications.

Performance Chart

Pressure (kPa)	Flow (lph)		
	2 lph	4 lph	8 lph
50	1.7	2.8	7.3
100	2.0	3.9	8.1
150	2.1	4.1	8.4
200	2.1	4.3	8.6
250	2.1	4.4	8.6
300	2.1	4.5	8.3
350	2.1	4.5	7.6
MINIMUM FLOW PATH DIMENSION (mm)	0.7 x 0.6	0.8 x 0.8	0.7 x 1.0

Flow Rate

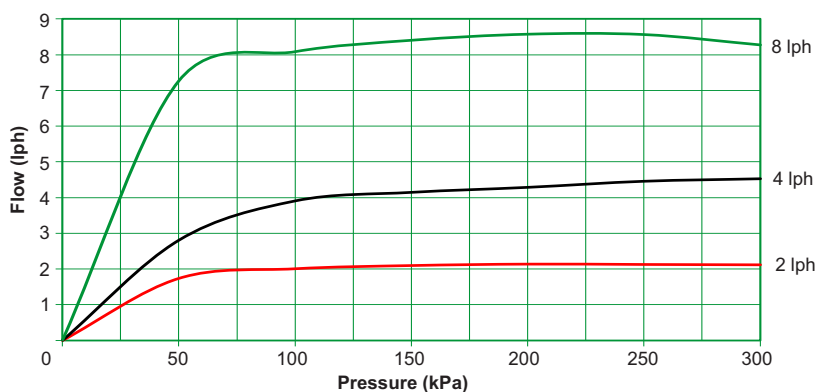

Agri Drip™ PC Dripper
Barb 4 mm

Ordering Information - Agri Drip™ PC

Flow	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
2 lph	30325	100	75	10.6
4 lph	30345	100	75	10.6
8 lph	30365	100	75	10.6

Specifications

Dimensions Assembled		UV Stabilised Material		Base/Connection Type	
HEIGHT	23 mm	BASE	polypropylene	Inlet:	BARB 4 mm
DIAMETER	20 mm	CAP	polypropylene	Outlet:	SPOUT 4 mm
WEIGHT (approx.)	1.3 g	DIAPHRAGM	silicone rubber		